



05

110-120LM/W

CRI 90

5W - 70LEDs/M

10W - 140LEDs/M

14W - 210LEDs/M


19W - 252LEDs/M

110-120LM/W

CRI 90

4.8W 70LEDs/M


7 led/group design, up to 120 lm/w.
2200-6000K Multi-color temperature optional



BK-2835-70LED-120LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	4.8W/M 1.46W/ft	Color Temperature		
Voltage	DC24V	● 2700K	530lm	F
CRI	90	● 3000K	560lm	F
Led Qty	70LEDs/M	● 4000K	600lm	F
Length/Reel	5M	● 5000K	575lm	F
Working Temperature	-20-50°C	● 6000K	580lm	F

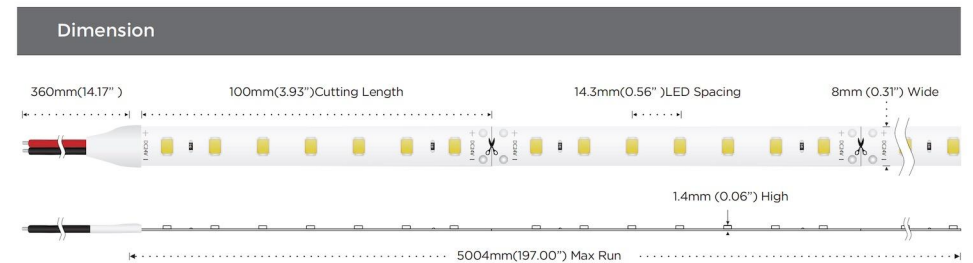


110-120LM/W

CRI 90

9.6W 140LEDs/M


7 led/group design, up to 120 lm/w.
2200-6000K Multi-color temperature optional



BK-2835-140LED-120LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	9.6W/M 2.93W/ft	Color Temperature		
Voltage	DC24V	● 2700K	1055lm	F
CRI	90	● 3000K	1105lm	F
Led Qty	140LEDs/M	● 4000K	1180 lm	F
Length/Reel	5M	● 5000K	1085lm	F
Working Temperature	-20-50°C	● 6000K	1115lm	F

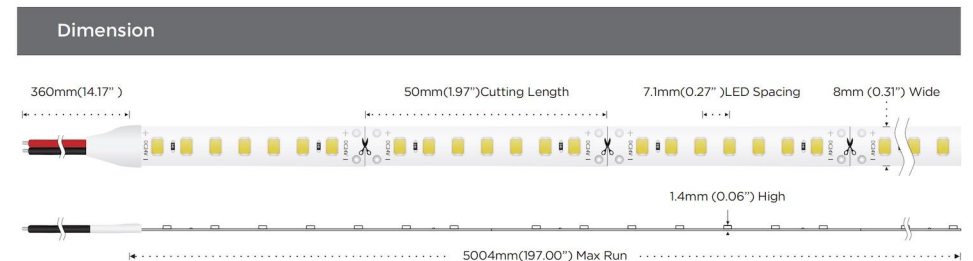


110-120LM/W

CRI 90

14.4W 210LEDs/M


7 led/group design, up to 120 lm/w.
2200-6000K Multi-color temperature optional



BK-2835-210LED-120LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	14.4W/M 4.39W/ft	Color Temperature		
Voltage	DC24V	● 2700K	1655lm	F
CRI	90	● 3000K	1700lm	F
Led Qty	210LEDs/M	● 4000K	1825lm	F
Length/Reel	5M	● 5000K	1845lm	F
Working Temperature	-20-50°C	● 6000K	1730lm	F

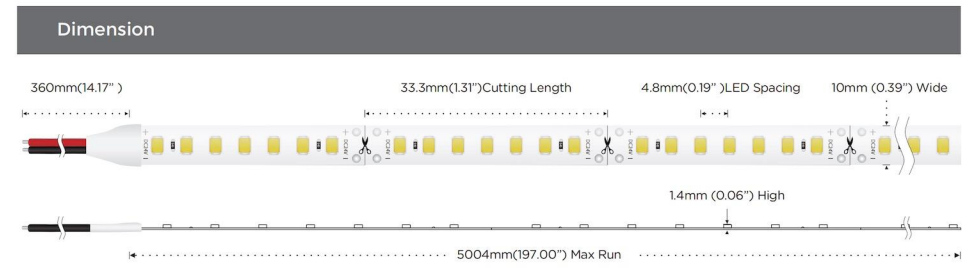


110-120LM/W

CRI 90


19.2W 252LEDs/M

7 led/group design, up to 120 lm/w.


2200-6000K Multi-color temperature optional



BK-2835-252LED-120LM-RA90

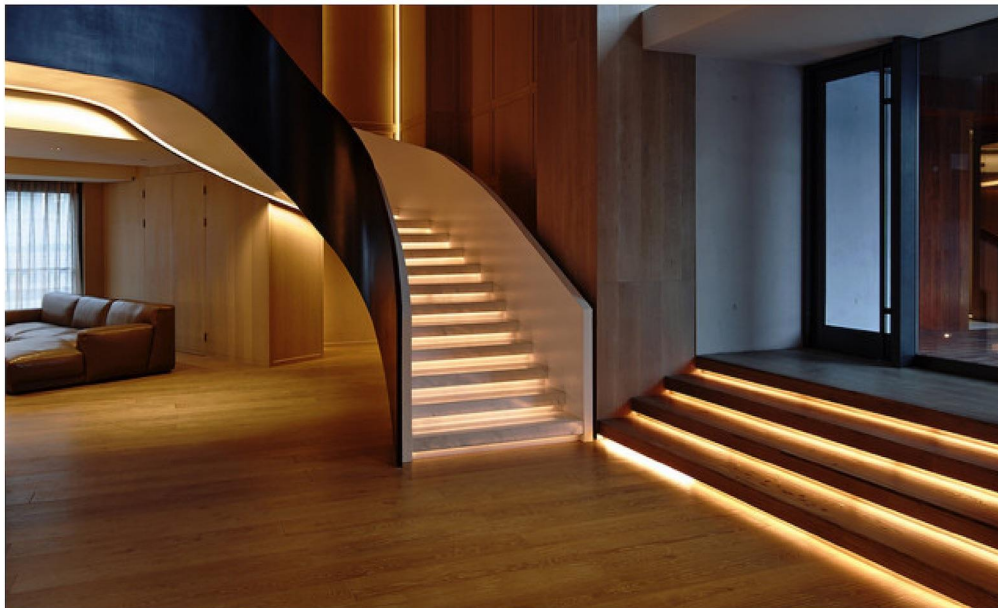

Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	19.2W/M 5.85W/ft	Color Temperature		
Voltage	DC24V	● 2700K	2215lm	F
CRI	90	● 3000K	2265lm	F
Led Qty	252LEDs/M	● 4000K	2300lm	F
Length/Reel	5M	● 5000K	2300lm	F
Working Temperature	-20-50°C	● 6000K	2300lm	F

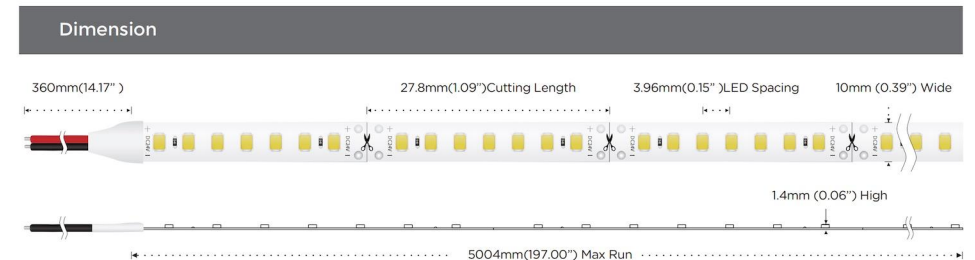



06

125-140LM/W

CRI 90

5W - 64LEDs/M

10W - 80LEDs/M

10W - 128LEDs/M


14W - 160LEDs/M

125-140LM/W

CRI 90

4.8W 64LEDs/M


8 led/group design, up to 140 lm/w.
2700-6000K Multi-color temperature optional



BK-2835-64LED-140LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	4.8W/M 1.46W/ft	Color Temperature		
Voltage	DC24V	● 2700K	615lm	E
CRI	90	● 3000K	625m	E
Led Qty	64LEDs/M	● 4000K	660lm	E
Length/Reel	5M	● 5000K	660lm	E
Working Temperature	-20-50°C	● 6000K	660lm	E

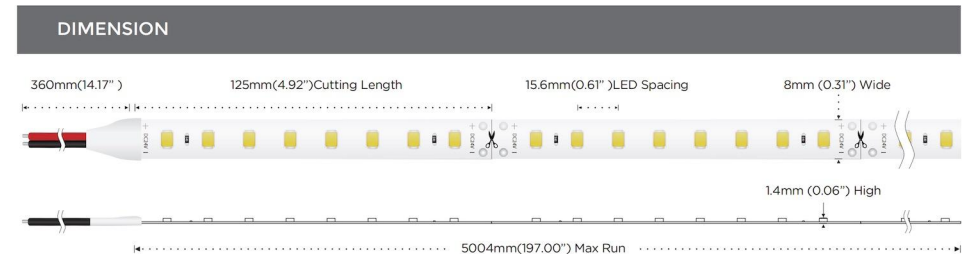


125-140LM/W

CRI 90

9.6W 80LEDs/M

8 led/group design, up to 140 lm/w.
2700-6000K Multi-color temperature optional




BK-2835-80LED-140LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	9.6W/M 2.93W/ft	Color Temperature		
Voltage	DC24V	● 2700K	1230lm	E
CRI	90	● 3000K	1250lm	E
Led Qty	80LEDs/M	● 4000K	1295lm	E
Length/Reel	5M	● 5000K	1295lm	E
Working Temperature	-20-50°C	● 6000K	1295lm	E

DIMENSION

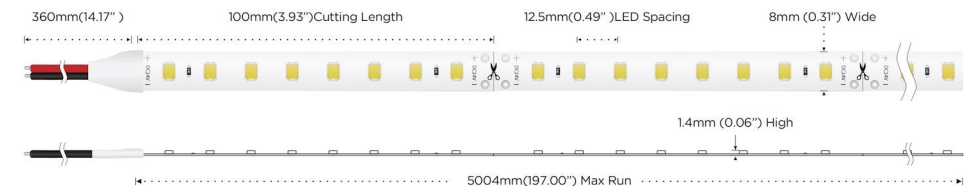


125-140LM/W

CRI 90

9.6W 128LEDs/M

8 led/group design, up to 140 lm/w.
2700-6000K Multi-color temperature optional




BK-2835-128LED-140LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	9.6W/M 2.93W/ft	Color Temperature		
Voltage	DC24V	● 2700K	1250lm	E
CRI	90	● 3000K	1270lm	E
Led Qty	128LEDs/M	● 4000K	1300lm	E
Length/Reel	5M	● 5000K	1310lm	E
Working Temperature	-20-50°C	● 6000K	1325lm	E

DIMENSION

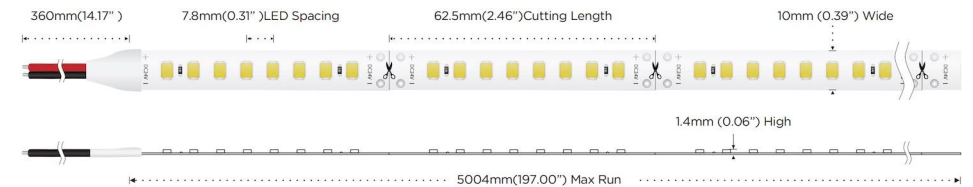


125-140LM/W


CRI 90

14.4W 160LEDs/M

8 led/group design, up to 140 lm/w.
2700-6000K Multi-color temperature optional




BK-2835-160LED-140LM-RA90

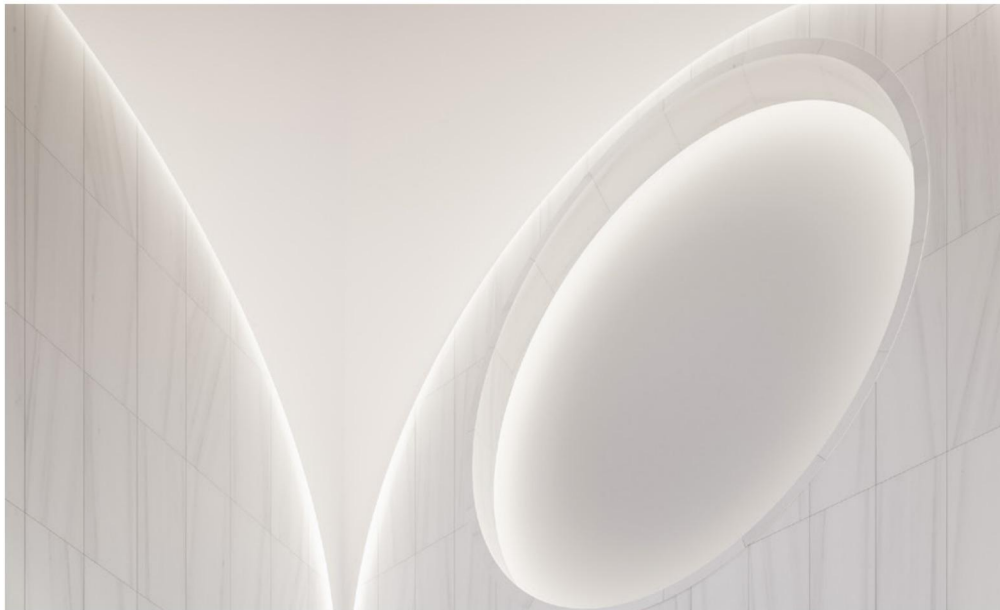

Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	14.4W/M 4.39W/ft	Color Temperature		
Voltage	DC24V	● 2700K	1845lm	E
CRI	90	● 3000K	1870lm	E
Led Qty	160LEDs/M	● 4000K	1945lm	E
Length/Reel	5M	● 5000K	1945lm	E
Working Temperature	-20-50°C	● 6000K	1945lm	E

DIMENSION

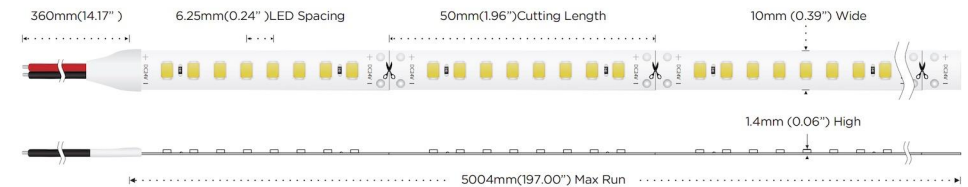



Shenzhen Bokun Technology Co., Ltd
Cohesive lighting technology, creating high quality of life

CONTACT

3F, Hongjingda Industrial Park, Shiyan Town, Bao'an District,
Shenzhen, China 518108

Tel: + 86 (755) 8983 2692
Fax: + 86 (755) 8983 2696
E-mail: s1@led-u.com