



# 07

**140-165LM/W**

RA 90

---

5W - 64LEDs/M

10W - 80LEDs/M

12W - 128LEDs/M


19W - 160LEDs/M

# 140-165LM/W

RA 90

4.8W 64LEDs/M


8 led/group design, up to 165 lm/w.  
2700-6000K Multi-color temperature optional



## BK-2835-64LED-165LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	4.8W/M 1.46W/ft	Color Temperature		
Voltage	DC24V	● 2700K	700lm	E
RA	90	● 3000K	725lm	D
Led Qty	64LEDs/M	● 4000K	810lm	D
Length/Reel	5M	● 5000K	770lm	D
Working Temperature	-20-50°C	● 6000K	770lm	D

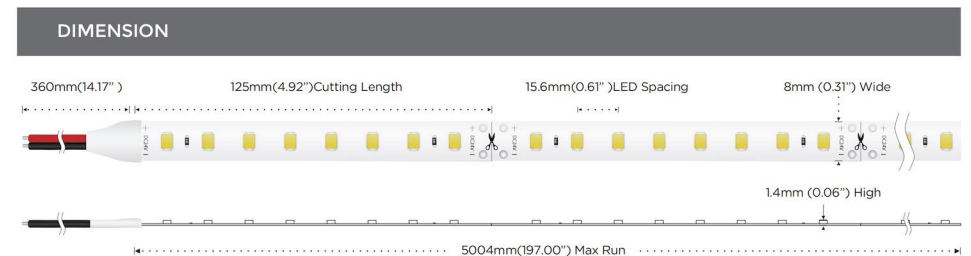




# 140-165LM/W

RA 90

9.6W 80LEDs/M


8 led/group design, up to 165 lm/w.  
2700-6000K Multi-color temperature optional



## BK-2835-80LED-165LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	9.6W/M 2.93W/ft	Color Temperature		
Voltage	DC24V	● 2700K	1360lm	E
RA	90	● 3000K	1445lm	D
Led Qty	80LEDs/M	● 4000K	1585lm	D
Length/Reel	5M	● 5000K	1475lm	D
Working Temperature	-20-50°C	● 6000K	1525lm	D

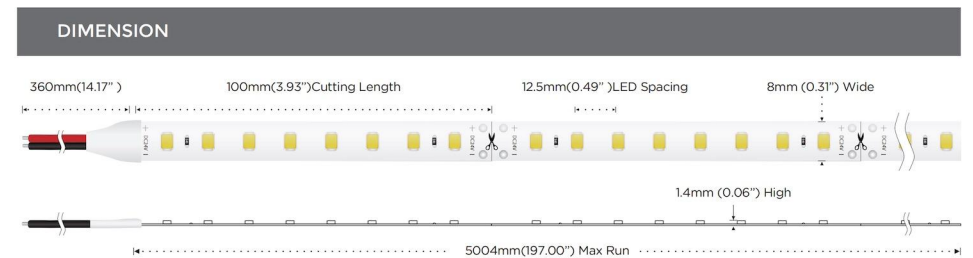


# 140-165LM/W

RA 90

14.4W 128LEDs/M

8 led/group design, up to 165 lm/w.


2700-6000K Multi-color temperature optional



## BK-2835-128LED-165LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	14.4W/M 4.39W/ft	Color Temperature		
Voltage	DC24V	2700K	2085lm	E
RA	90	3000K	2160m	D
Led Qty	128LEDs/M	4000K	2430lm	D
Length/Reel	5M	5000K	2245lm	D
Working Temperature	-20-50°C	6000K	2260lm	D

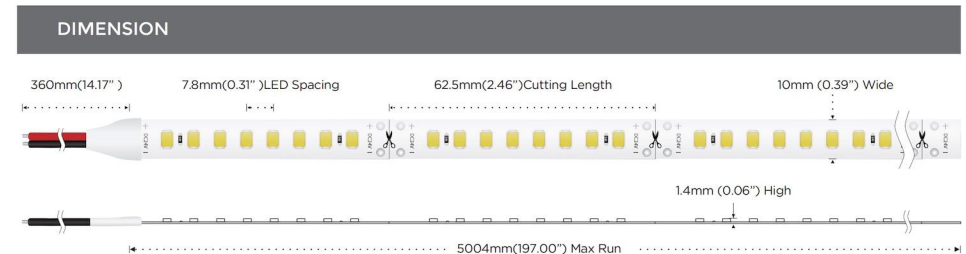


# 140-165LM/W

RA 90

19.2W 160LEDs/M

8 led/group design, up to 165 lm/w.

2700-6000K Multi-color temperature optional




BK-2835-160LED-165LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	19.2W/M 5.85W/ft	Color Temperature		
Voltage	DC24V	● 2700K	2725lm	E
RA	90	● 3000K	2895m	D
Led Qty	160LEDs/M	● 4000K	3185lm	D
Length/Reel	5M	● 5000K	2975lm	D
Working Temperature	-20-50°C	● 6000K	3010lm	D

## DIMENSION

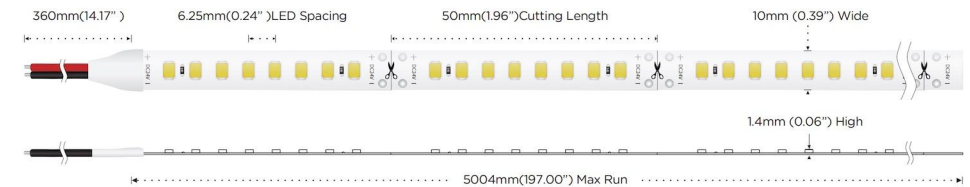





# 08

**170-195LM/W**

RA 90

---

5W - 90LEDs/M


10W - 180LEDs/M

# 170-195LM/W

RA 90

4.8W 90LEDs/M


9 led/group design, up to 195 lm/w.  
2700-6000K Multi-color temperature optional



## BK-2835-90LED-195LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	4.8W/M 1.46W/ft	Color Temperature		
Voltage	DC24V	● 2700K	825lm	D
RA	90	● 3000K	840m	C
Led Qty	90LEDs/M	● 4000K	910lm	C
Length/Reel	5M	● 5000K	895lm	C
Working Temperature	-20-50°C	● 6000K	930lm	C

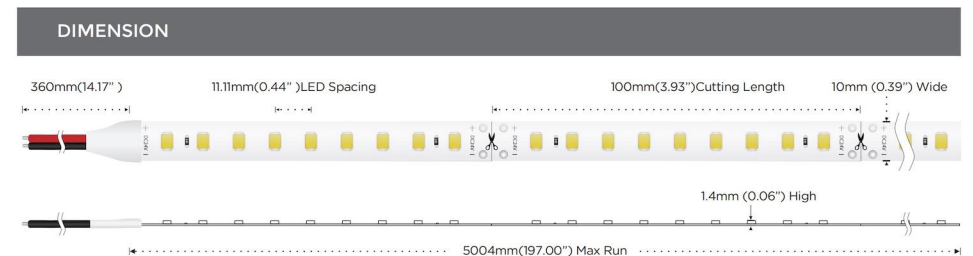




# 170-195LM/W

RA 90

9.6W 180LEDs/M


9 led/group design, up to 195 lm/w.  
2700-6000K Multi-color temperature optional



## BK-2835-180LED-195LM-RA90



Technical Details		Lumens Per Meter		Energy Efficiency Class
Power	9.6W/M 2.92W/ft	Color Temperature		
Voltage	DC24V	2700K	1660lm	D
RA	90	3000K	1670lm	C
Led Qty	180LEDs/M	4000K	1830lm	C
Length/Reel	5M	5000K	1800lm	C
Working Temperature	-20-50°C	6000K	1850lm	C

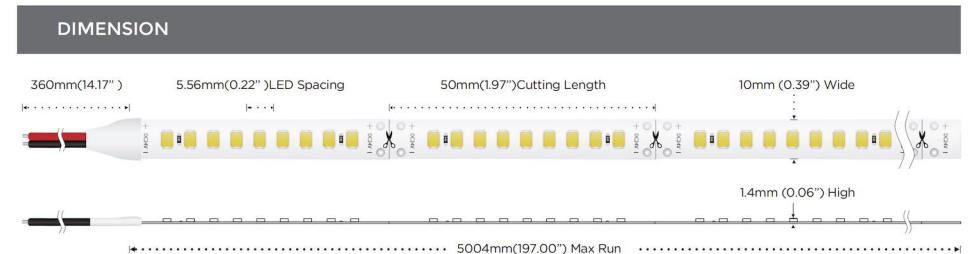





**Shenzhen Bokun Technology Co., Ltd**  
Cohesive lighting technology, creating high quality of life

**CONTACT**

3F, Hongjingda Industrial Park, Shiyan Town, Bao'an District,  
Shenzhen, China 518108

Tel: + 86 (755) 8983 2692  
Fax: + 86 (755) 8983 2696  
E-mail: [s1@led-u.com](mailto:s1@led-u.com)